



ACQUA/WATER

球 閥




FRATELLI
PETTINAROLI S.p.A.
CLIMATE SYSTEMS TECHNOLOGY



51F 过滤型球阀

内螺纹球阀，内置过滤网以及检修端口FM28，蓝色铁手柄，符合EN 13828标准。

尺寸:

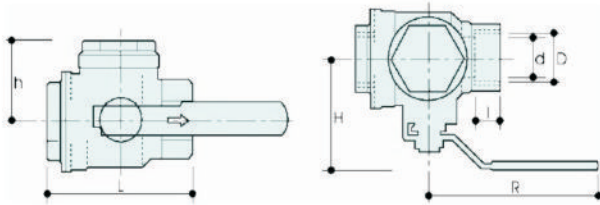

D"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	18	20	28.5	35.5	45	56
H	50	50	66	82	89	120
h	37	37	51	60	74	90
l	15	16	21.5	23.5	23.5	28
L	69	69	95	111	127	154
R	95	95	120	150	150	200
Acc.	2	2	3	4	4	5
Gr.	445	450	1160	1850	2800	5400

所有螺纹按照ISO7/1 及ISO 228标准生产

原材料:



- 本体 CuZn36Pb2As Cw602N (DIN 50930 part. 6)
- 阀球 CuZn36Pb2As Cw602N (DIN 50930 part. 6)
- 阀杆 Diamantata e cromata.
- 压帽 CuZn39Pb3 Cw614N (DIN 50930 part. 6)
- 连接件 CuZn36Pb2As Cw602N (DIN 50930 part. 6)
- O型圈 2 x FKM fluoroelastomero
- 密封垫 PTFE
- 过滤网 Acciaio AISI 304
- 手柄 Acciaio con rivestimento in PVC eseguito mediante "Pad printing"

可选配件:

- 51F F X F, 蓝色铁手柄
- 51FP F x 泵用接头, 蓝色铁手柄


可选手柄:

- 51F 蓝色铁手柄
- 52F 蓝色蝶形手柄
- 53F 机动减速器

APPROVAZIONI (认证)



压力下降图:

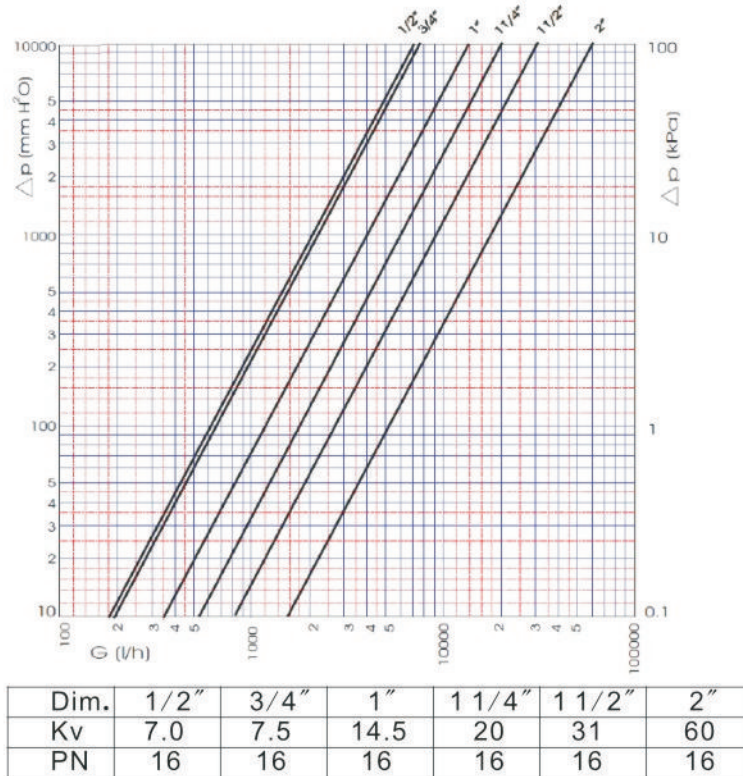

压力/温度建议极限值:

16 bar - 115°C - 没有震动的情况下

10 bar - 150°C - 没有震动的情况下

球阀的维护和安装说明:



球阀可互换过滤器的圆柱，很容易检查和正常维护。

该阀具有可逆把手，因此不能安装在水平位置，提供了过滤器的维护通常是实际用途可能。

APPROVAZIONI (认证)

