



GAS/GAS

燃气阀门




FRATELLI  
**PETTINAROLI** s.p.a.  
CLIMATE SYSTEMS TECHNOLOGY



### G50

全通径球阀，内螺纹  
黄色铝手柄  
符合UNI C. I. G. EN331标准

尺寸:

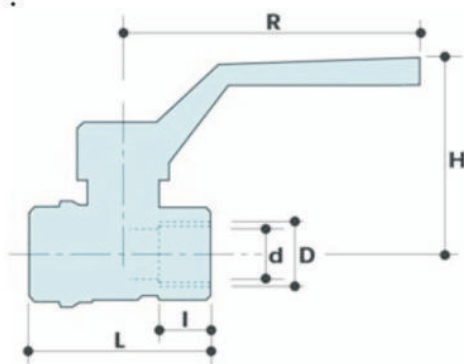

D	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"
d	10	10	15	20	25	32	40
H	50.5	50.5	54	63.5	75.5	80.5	100
I	11.5	12	17	18	21.5	23.5	23.5
L	46	47	62	69	84	96	106
R	82	82	82	95	120	120	150
Acc.	1	1	1	2	3	3	4
PN	8	8	8	8	8	8	8
g	140	140	230	350	650	1010	1340

所有螺纹按照ISO7/1 及ISO 228标准生产

#### 原材料:

本体 CuZn40Pb2 Cw617N (DIN 50930 part. 6)  
 球阀 CuZn40Pb2 Cw617N (DIN 50930 part. 6)  
 Diamantata e cromata.  
 阀杆 CuZn39Pb3 Cw614N (DIN 50930 part. 6)  
 压帽 CuZn39Pb3 Cw614N (DIN 50930 part. 6)  
 Regolabile.  
 密封垫 PTFE  
 O型圈 2 x Viton ®  
 PTFE  
 手柄 铝

#### 可选配件:

G50 F X F, 黄色铝手柄  
 G50/1 F X M, 黄色铝手柄  
 G50/2 M X M, 黄色铝手柄

#### 扩展型号:

G50 黄色铝手柄  
 G51 黄色钢手柄  
 G52 黄色蝴蝶手柄  
 G56 黄色帽



#### 压力/温度建议极限值:

最大压力 8bar  
 最低温度 -20°C  
 最高温度 60°C

#### APPROVAZIONI (认证)

