




## 51NDAV

M x M 重型全流量球阀减速器。  
根据 EN 13828

## 尺寸

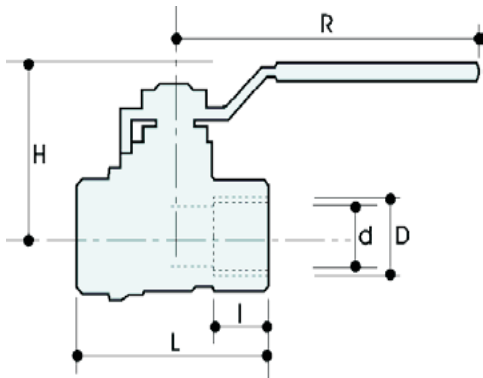

D	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	10	15	20	25	32	40	50
H	36	39	49	61	66	82	89
I	12	17	18	21.5	23.5	23.5	28
L	47	62	69	84	96	106	127
R	75	75	95	120	120	150	150
Acc.	1	1	2	3	3	4	4
g	140	230	370	680	1050	1560	2580

All threads are in accordance with ISO 7/1 or ISO 228

## 材料



## 可选配件

51NDAV F X F, 青钢杆

本体	CuZn36Pb2As Cw602N (DIN 50930 part. 6)
阀球	CuZn36Pb2As Cw602N (DIN 50930 part. 6) 钻石抛光和镀铬。
阀杆	CuZn36Pb2As Cw602N (DIN 50930 part. 6)
压帽	CuZn39Pb3 CW614N (DIN 50930 part. 6) 可调。
密封圈	聚四氟乙烯
O型圈	2个氟橡胶 □ PTFE密封。
杠杆	镀锌钢。


## 可选手柄

51NDA 白钢拉杆  
51NDAV 绿色钢铁杆  
51NDAQC 蓝钢拉杆  
52NDA 红蝶手柄  
53NDA 齿轮柄


## APPROVALS(认证)



### 压降图

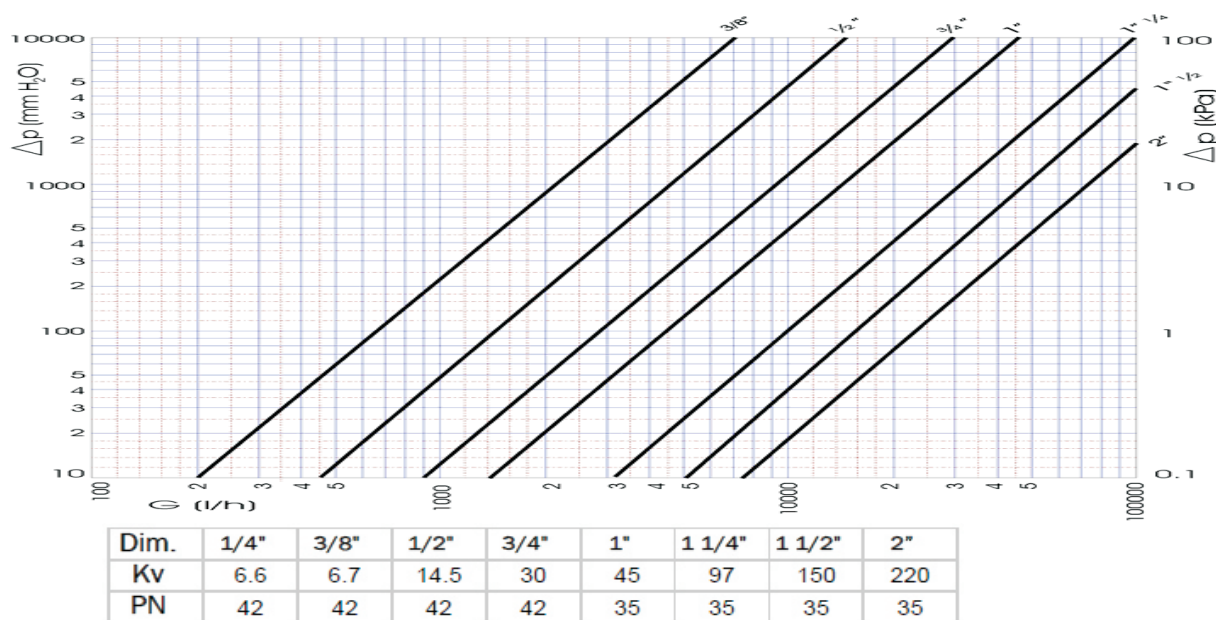

### 温度/压力图

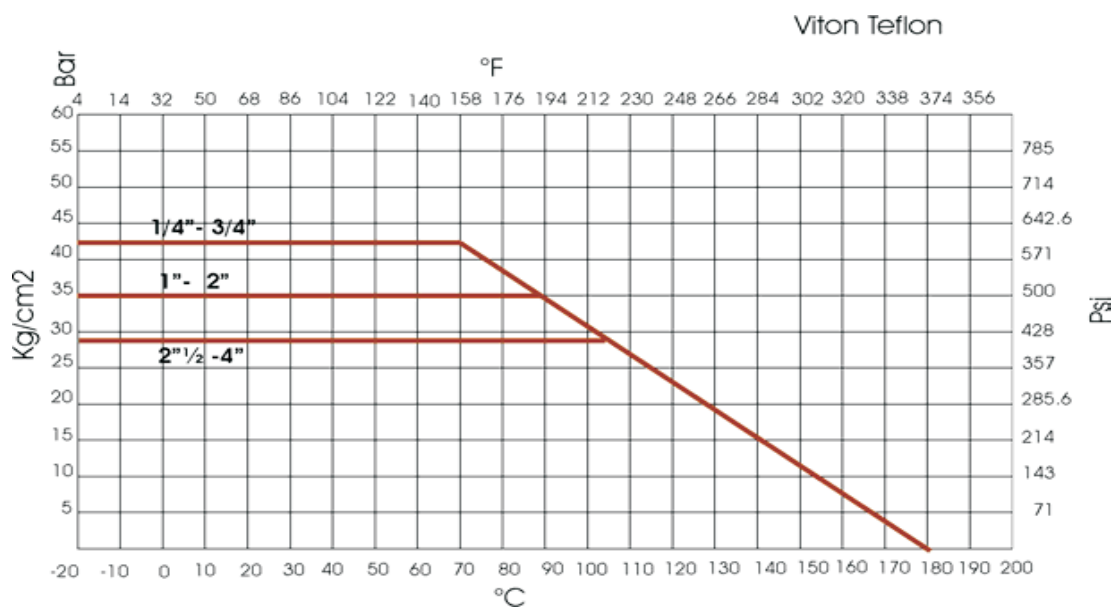

#### 推荐工作温度/压力极限

- 30 bar - 100° C - 非冲击
- 10 bar - 150° C - 非冲击