




G50

FxF重型全流量球阀

根据 EN 331

尺寸

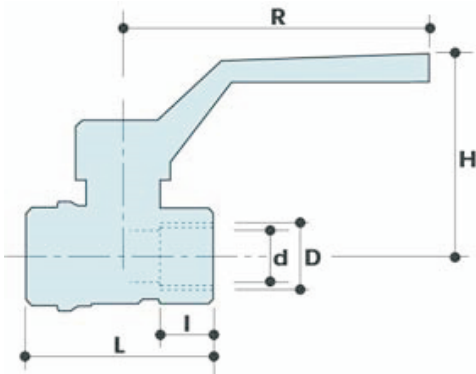

D	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
d	10	10	15	20	25	32	40	50	63	76
H	50.5	50.5	54	63.5	75.5	80.5	100	107	120	135
I	11.5	12	17	18	21.5	23.5	23.5	28	32	34.5
L	46	47	62	69	84	96	106	127	154	180
R	82	82	82	95	120	120	150	150	200	200
Acc.	1	1	1	2	3	3	4	4	5	5
PN	8	8	8	8	8	8	8	8	5	5
g	140	140	230	350	650	1010	1340	2090	3750	5650

All threads are in accordance with ISO 7/1 or ISO 228

材料



球体	CuZn40Pb2 CW617N (DIN 50930 part. 6)
阀球	CuZn40Pb2 CW617N (DIN 50930 part. 6) 钻石抛光和镀铬。
阀杆	CuZn39Pb3 CW614N (DIN 50930 part. 6)
压帽	CuZn39Pb3 CW614N (DIN 50930 part. 6) 可调。
密封圈	聚四氟乙烯
O型圈	2个氟橡胶® PTFE密封。
杠杆	铝合金杆

可选配件

- G50 FXF, 黄色铝合金手扳
- G50/1 FXM, 黄色铝合金手扳
- G50/2 MXM, 黄色铝合金手扳


可选手柄

- G50 黄色铝合金手扳
- G51 黄钢拉杆
- G52 黄色蝶形手柄
- G56 黄盖

APPROVALS(认证)



压降图

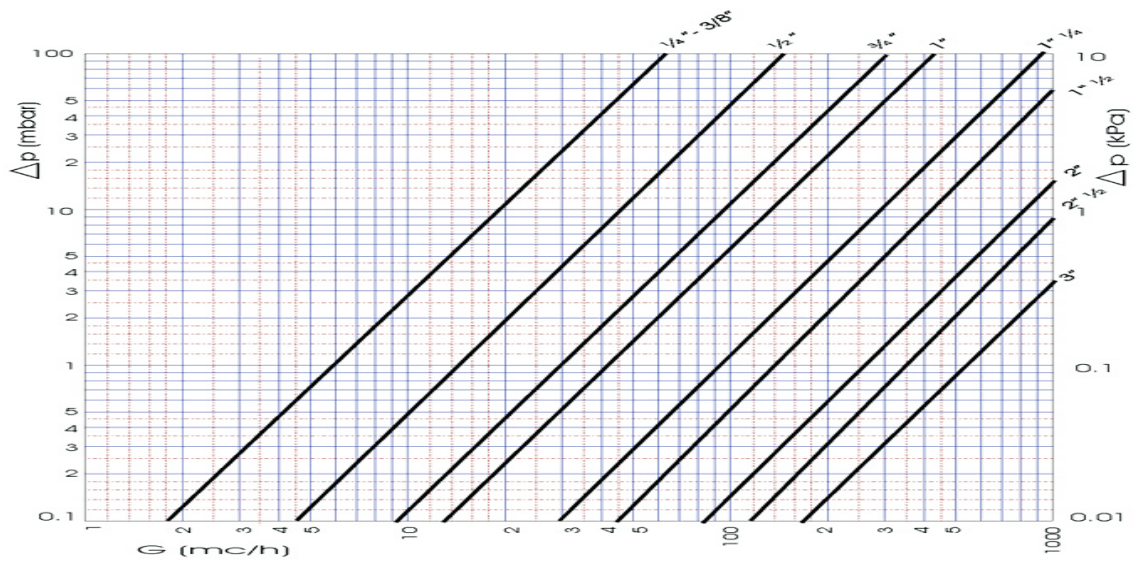

推荐工作温度/压力极限

最大. 压力 8 bar
 最小. 温度 -20° C
 最大. 温度 60° C